

TECHNICAL DATA



C5028-M

50mm 1:2.8

calculated


●Optical Transfer Function (OTF)

W.D. = 250mm

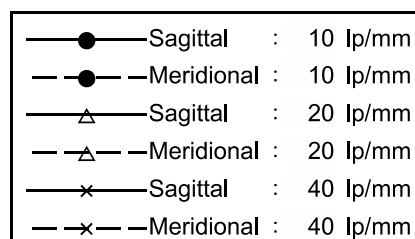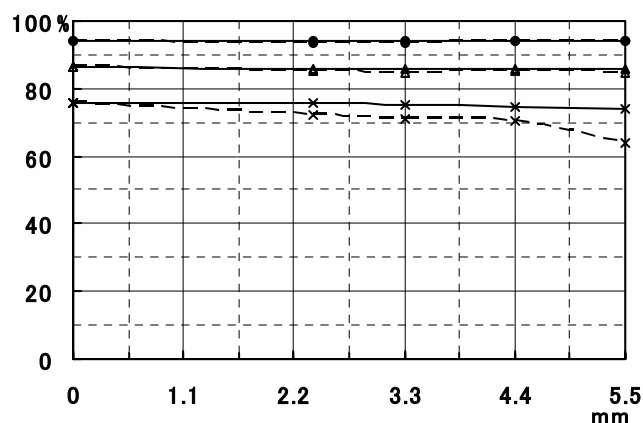


4D-0354T0075


●Distortion (歪曲収差)

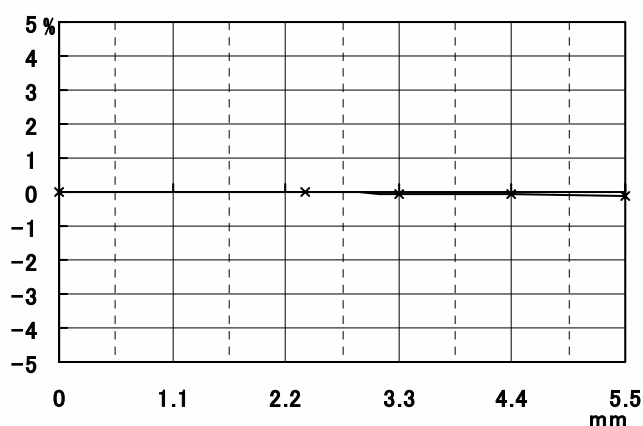

●Vignetting (周辺光量)

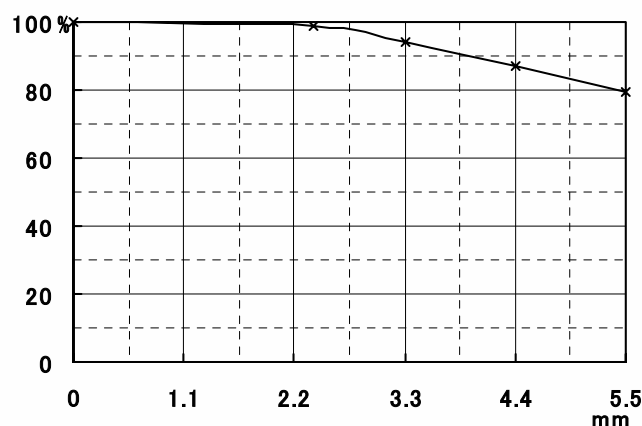

●Spectral Transmittance (分光透過率)

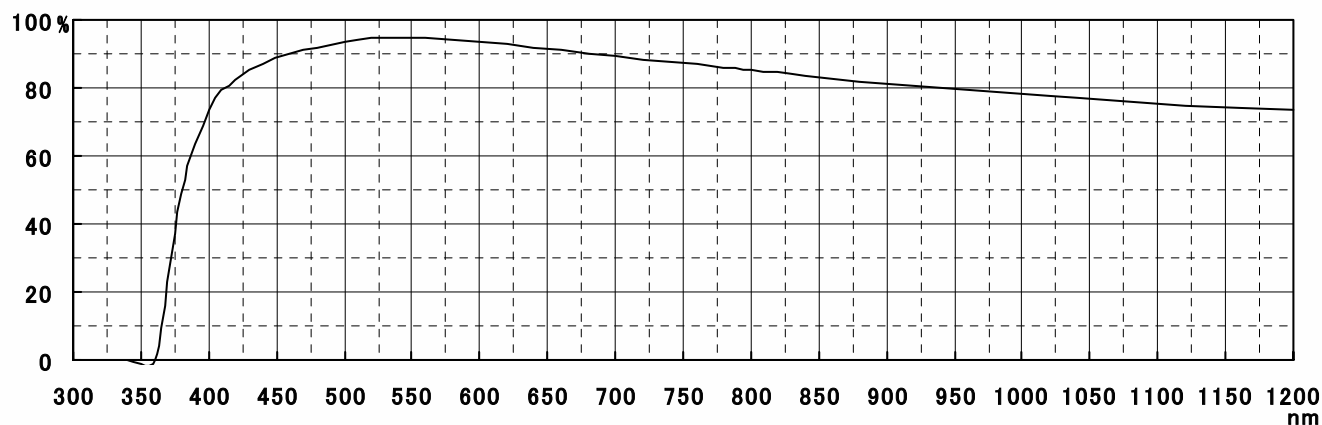

●Resolving Power (解像力)

y	0	3.3	4.4	5.5		
Rr(S)	200	160	160	160		
Rt(M)		125	100	80		

●Entrance Pupil Position (入射瞳位置)

-3.21 [mm] *

●Exit Pupil Position (射出瞳位置)

-26.53 [mm] *

●1st Principal Point (第一主点)

-47.39 [mm] *

●2nd Principal Point (第二主点)

-49.98 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

35001

1 / 1