

TECHNICAL DATA



C3516-M

35mm 1:1.6

calculated


●Optical Transfer Function (OTF)

W.D. = 250mm

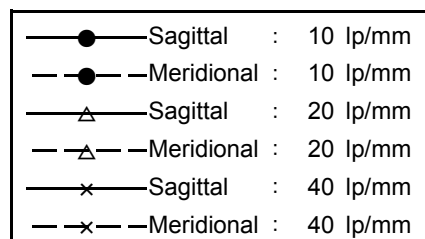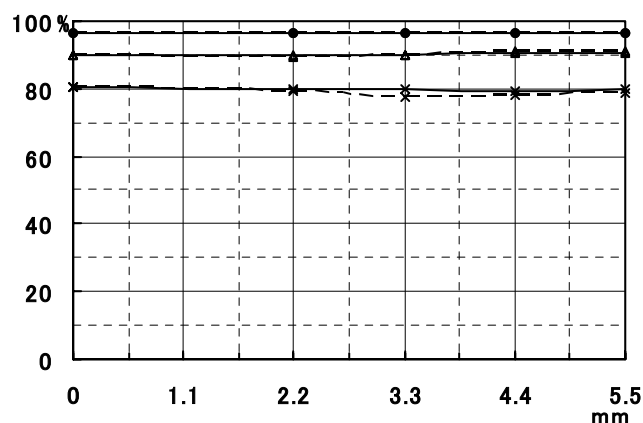


4D-0264T0075


●Distortion (歪曲収差)

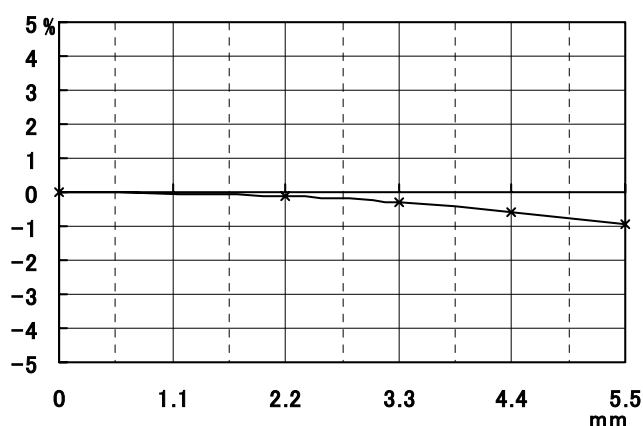

●Vignetting (周辺光量)

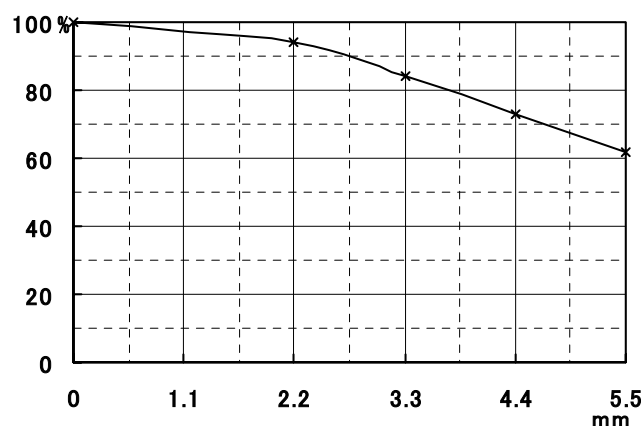

●Spectral Transmittance (分光透過率)

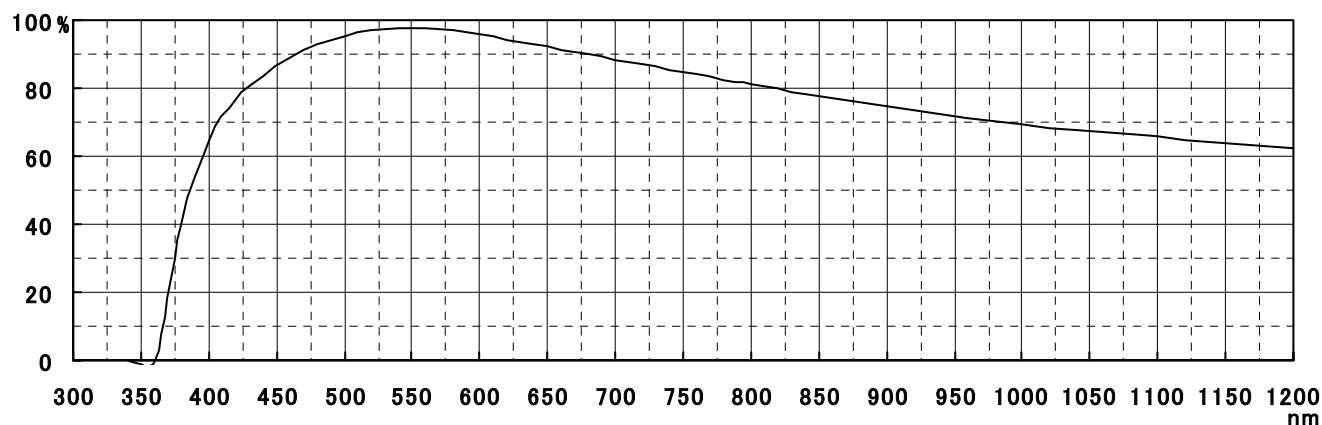

●Resolving Power (解像力)

y	0	3.3	4.4	5.5		
Rr(S)		200	160	125		
Rt(M)	200	200	200	160		

●Entrance Pupil Position (入射瞳位置)

-11.28 [mm] *

●Exit Pupil Position (射出瞳位置)

-34.29 [mm] *

●1st Principal Point (第一主点)

-10.95 [mm] *

●2nd Principal Point (第二主点)

-33.95 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

33500

1 / 1