TECHNICAL DATA	C2514-5M 25mm 1:1.4	**calculated**

●Optical Transfer Function (OTF)

W.D. = 250mm

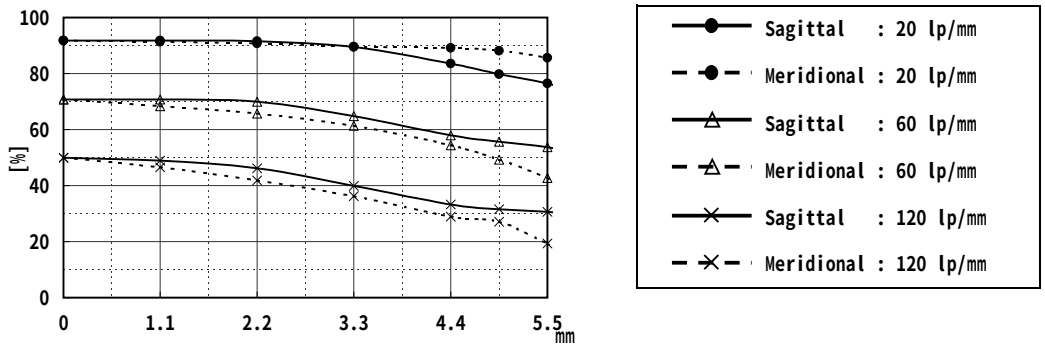

●Distortion (歪曲収差)

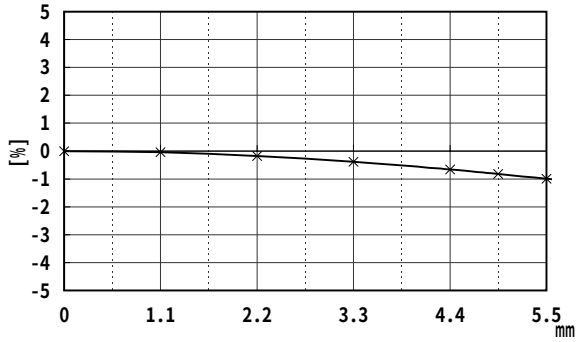

●Vignetting (周辺光量)

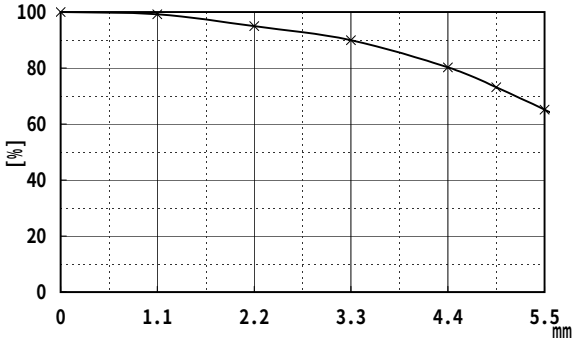

●Spectral Transmittance (分光透過率)

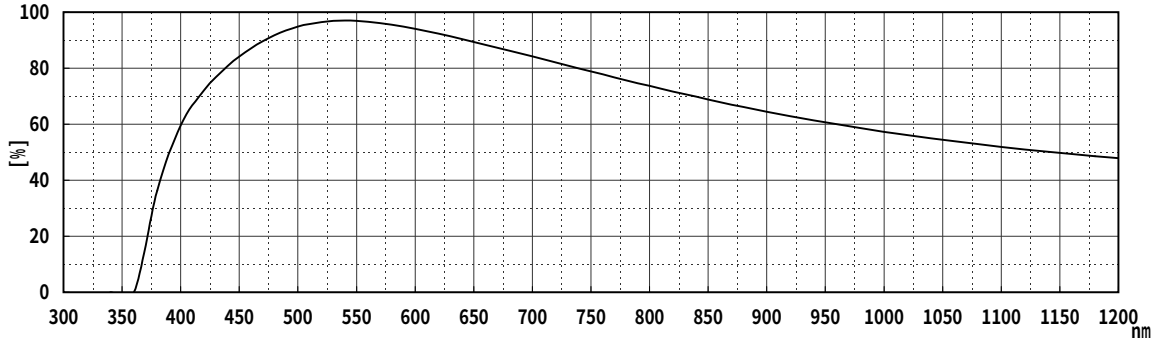

●Entrance Pupil Position (入射瞳位置)	-22.37	[mm]*
●Exit Pupil Position (射出瞳位置)	-50.23	[mm]*
●1st Principal Point (第一主点)	-9.81	[mm]*
●2nd Principal Point (第二主点)	-25.00	[mm]*

(*:From Image Plane , W.D.=∞)

HOYA CORPORATION PENTAX Imaging Systems Division	これらの値は設計データより算出された値です。/ 光学設計グループ The above figures are calculated on desing data./ Optical Design Group	Drawing Number 32501 1 / 1