

TECHNICAL DATA


B2528-UV

25mm 1:2.8


calculated

●Optical Transfer Function (OTF)


Ultraviolet 266nm

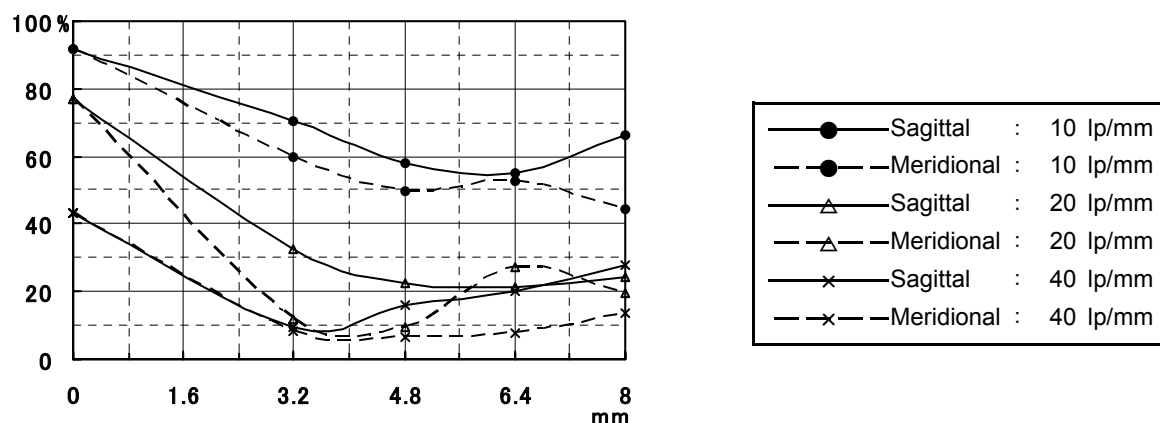


●Distortion (歪曲収差)

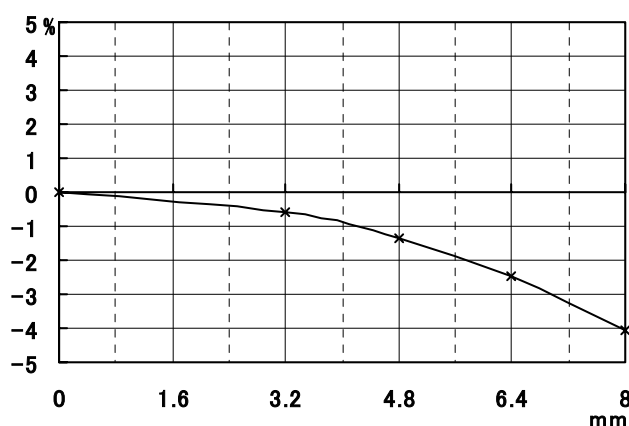

●Vignetting (周辺光量)

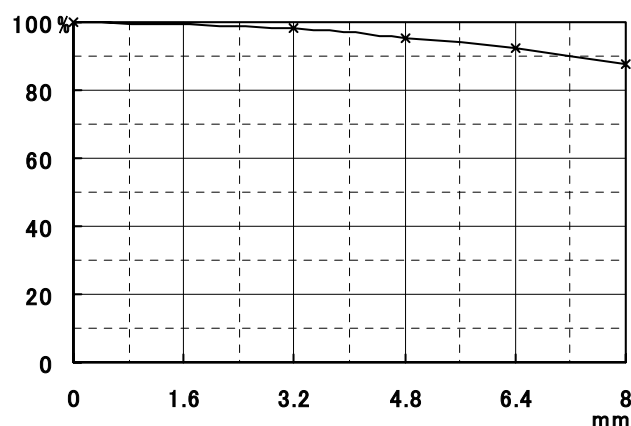

●Spectral Transmittance (分光透過率)

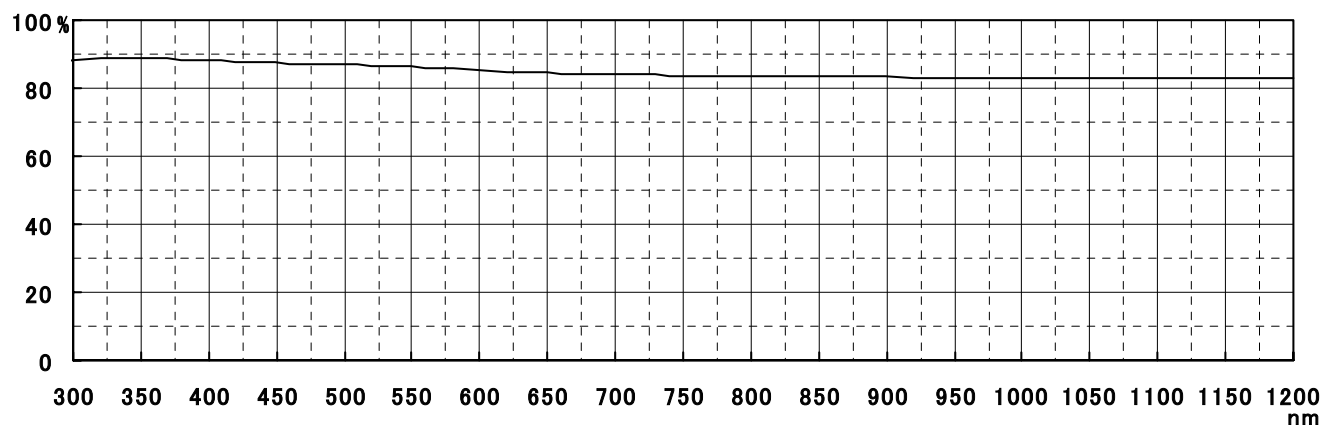

●Resolving Power (解像力)

y						
Rr(S)						
Rt(M)						

●Entrance Pupil Position (入射瞳位置)

-25.95 [mm] *

●Exit Pupil Position (射出瞳位置)

-26.15 [mm] *

●1st Principal Point (第一主点)

-24.89 [mm] *

●2nd Principal Point (第二主点)

-25.04 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

91699

1 / 1