



TECHNICAL DATA

C1614A

16mm 1:1.4


calculated

●Optical Transfer Function (OTF)

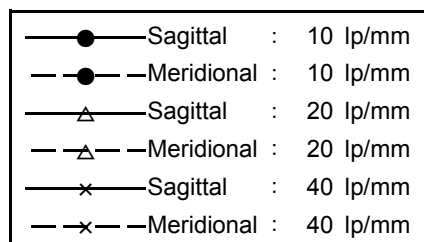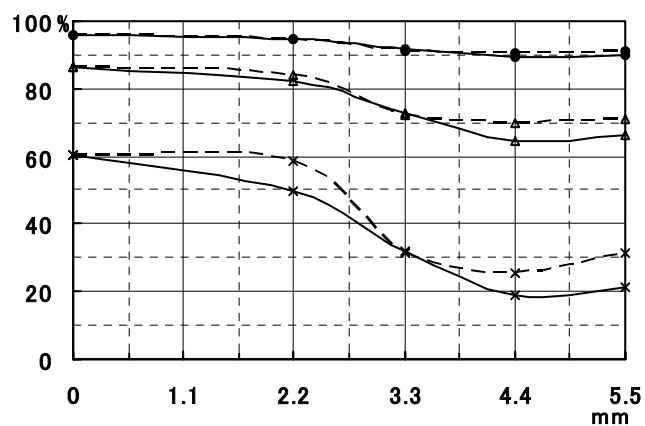


4D-0821T0170


●Distortion (歪曲収差)

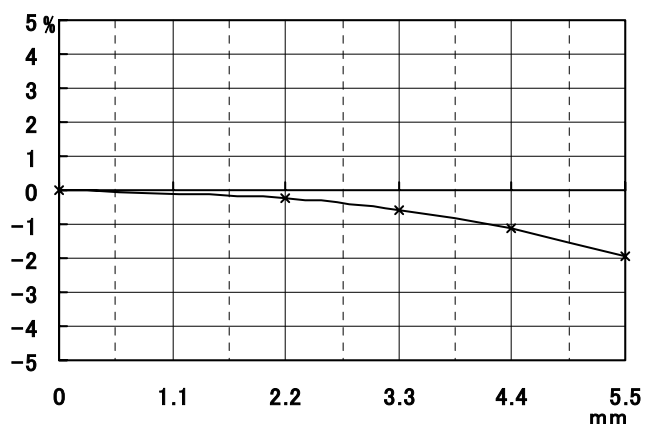

●Vignetting (周辺光量)

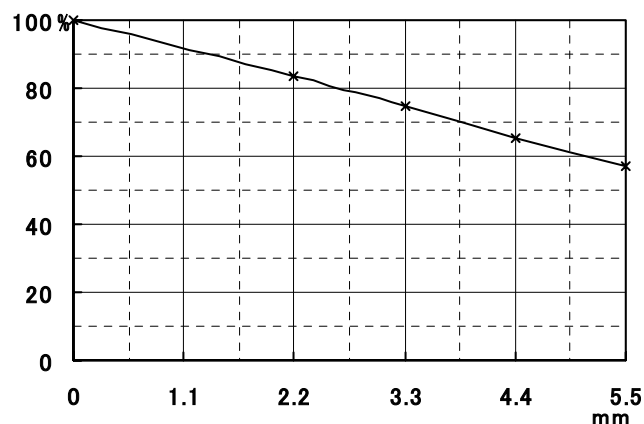

●Spectral Transmittance (分光透過率)

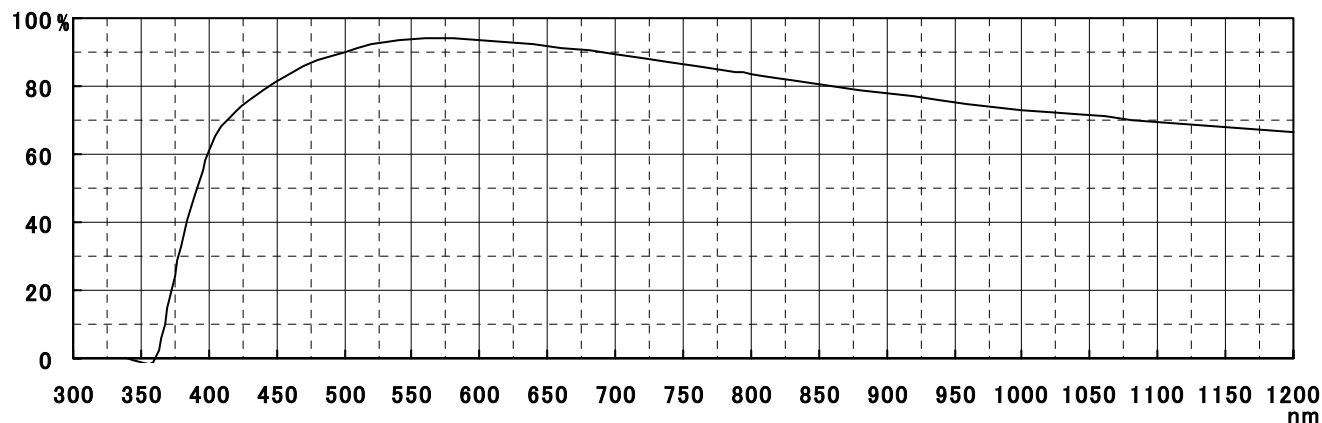

●Resolving Power (解像力)

y	0	3.3	4.4	5.5		
Rr(S)		40	32	32		
Rt(M)	63	32	32	40		

●Entrance Pupil Position (入射瞳位置)

-30.34 [mm] *

●Exit Pupil Position (射出瞳位置)

-44.37 [mm] *

●1st Principal Point (第一主点)

-20.05 [mm] *

●2nd Principal Point (第二主点)

-16.20 [mm] * (* : From Image Plane)

HOYA CORPORATION
PENTAX Imaging Systems Division

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

31633

1/1