


TECHNICAL DATA

FL-HC0416X-VG


4.2mm 1:1.6

calculated


●Optical Transfer Function (OTF)

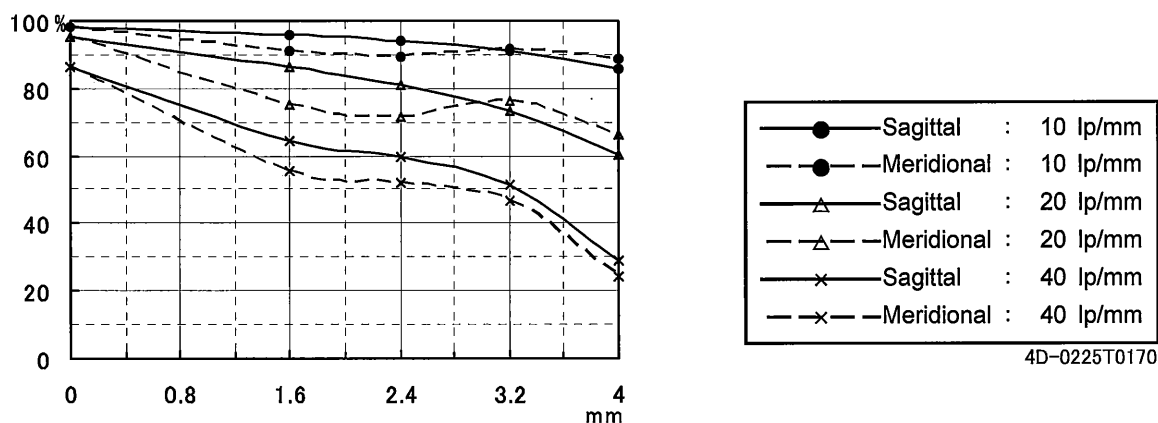


●Distortion (歪曲収差)

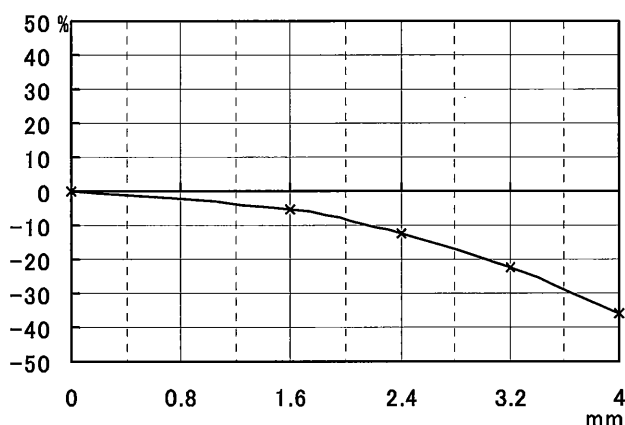

●Vignetting (周辺光量)

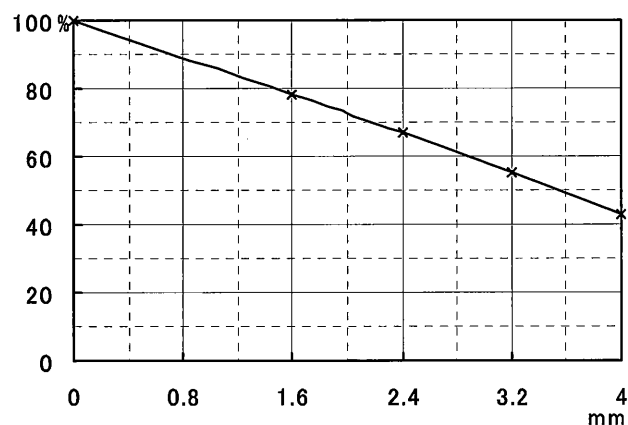

●Spectral Transmittance (分光透過率)

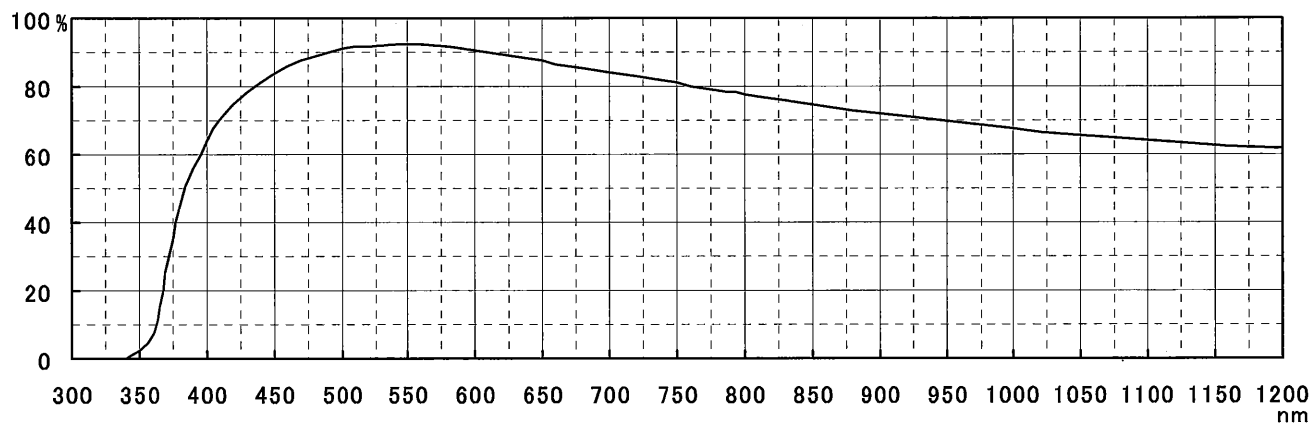

●Resolving Power (解像力)

y	0	2.4	3.2	4		
Rr(S)	160	125	80	32		
Rt(M)		63	50	32		

●Entrance Pupil Position (入射瞳位置)

-45.95 [mm] *

●Exit Pupil Position (射出瞳位置)

-47.07 [mm] *

●1st Principal Point (第一主点)

-42.00 [mm] *

●2nd Principal Point (第二主点)

-4.35 [mm] * (* : From Image Plane)

RICOH Industrial Solutions Inc.

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

60402

1 / 1