



TECHNICAL DATA

FL-BC1214D-VG

12.5mm 1:1.4


calculated

●Optical Transfer Function (OTF)

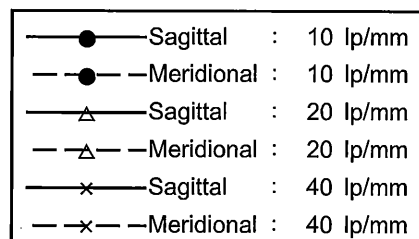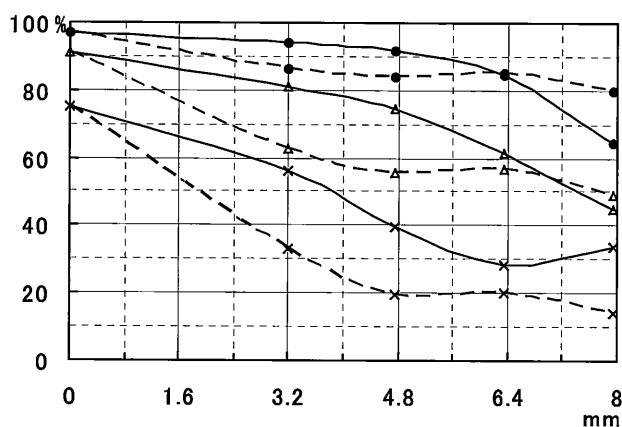


4D-0427T0240


●Distortion (歪曲収差)

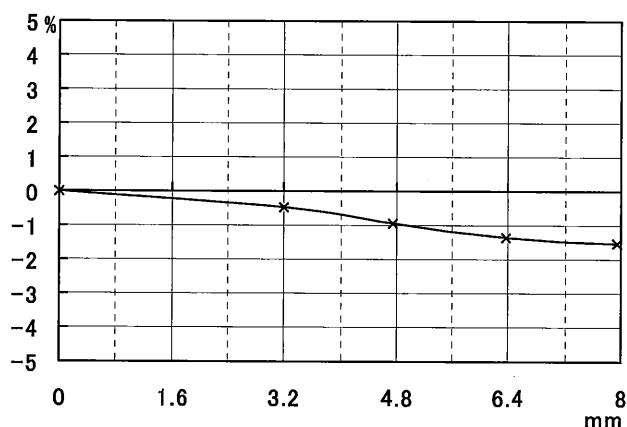

●Vignetting (周辺光量)

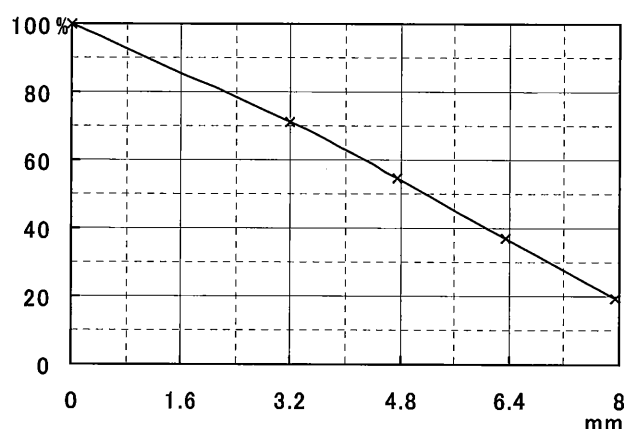

●Spectral Transmittance (分光透過率)

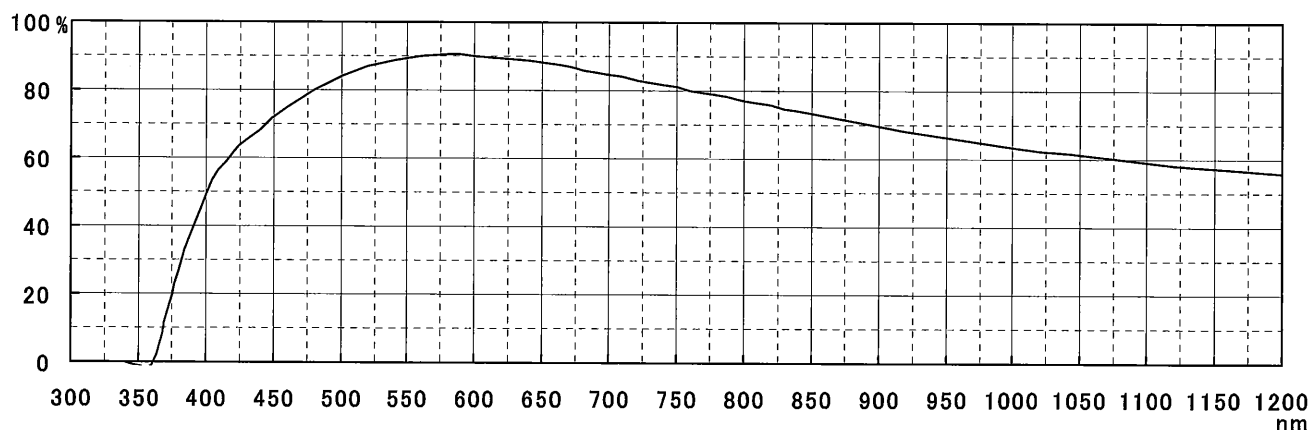

●Resolving Power (解像力)

y	0	4.76	6.35	7.94		
Rr(S)	100	40	32	50		
Rt(M)		32	32	25		

●Entrance Pupil Position (入射瞳位置)

-42.05 [mm] *

●Exit Pupil Position (射出瞳位置)

-33.59 [mm] *

●1st Principal Point (第一主点)

-34.14 [mm] *

●2nd Principal Point (第二主点)

-12.71 [mm] * (* : From Image Plane)

RICOH Industrial Solutions Inc.

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

21226

1/1