

## TECHNICAL DATA



FL-HC1214-2M

12mm 1:1.4

calculated


## ●Optical Transfer Function (OTF)

W.D. = 250mm

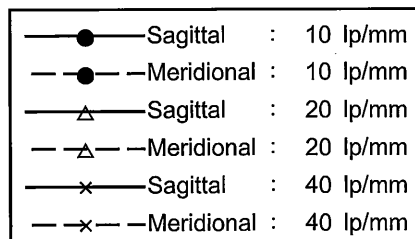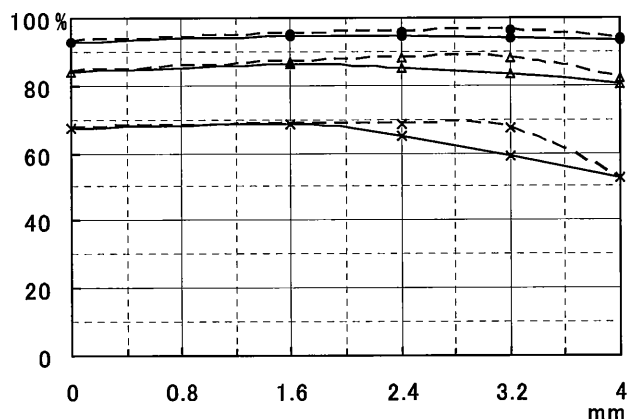


4D-0506T0075


## ●Distortion (歪曲収差)

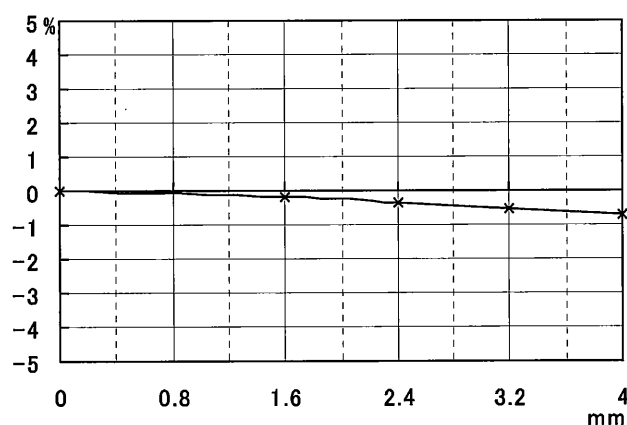

## ●Vignetting (周辺光量)

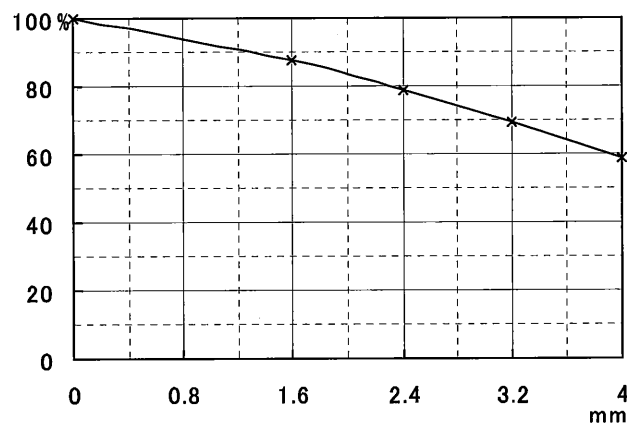

## ●Spectral Transmittance (分光透過率)

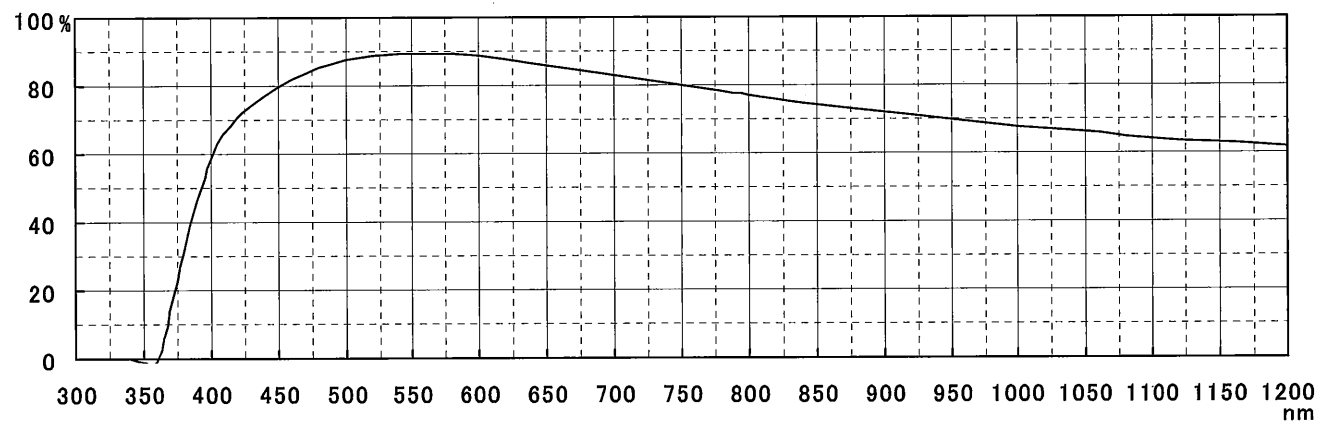

## ●Resolving Power (解像力)

$\gamma$	0	2.4	3.2	4		
Rr(S)		125	100	80		
Rt(M)	100	80	80	50		

## ●Entrance Pupil Position (入射瞳位置)

-25.77 [mm] \*

## ●Exit Pupil Position (射出瞳位置)

-34.53 [mm] \*

## ●1st Principal Point (第一主点)

-17.81 [mm] \*

## ●2nd Principal Point (第二主点)

-12.44 [mm] \* (\* : From Image Plane)

RICOH Industrial Solutions Inc.

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

61232

1/1