| TECHNICAL DATA | FL-CC1218-5MX 12mm 1:1.8 | calculated |
|---|---|---|

●Modulation Transfer Function (MTF)

W.D. = 250mm

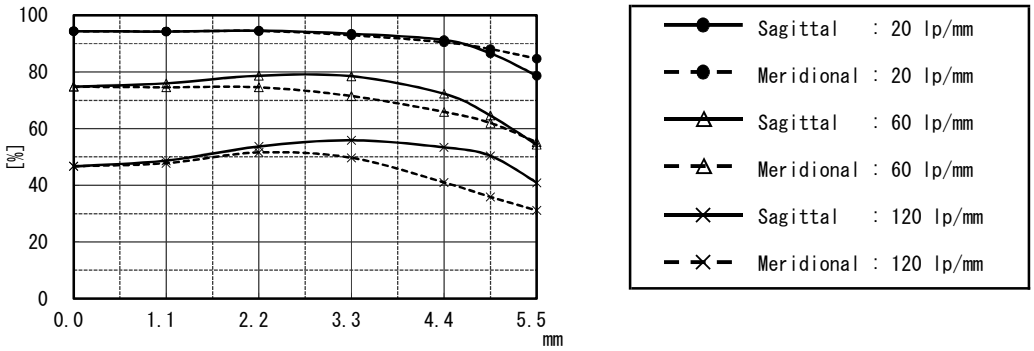


●Distortion (歪曲収差)

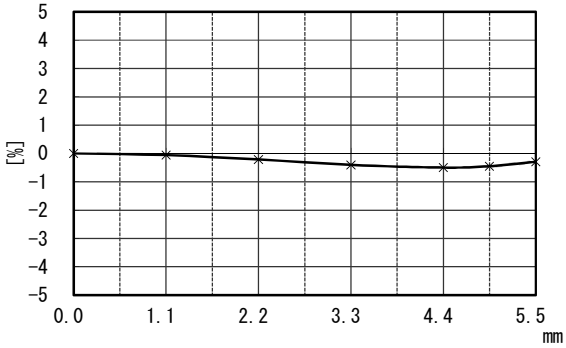


●Vignetting (周辺光量)

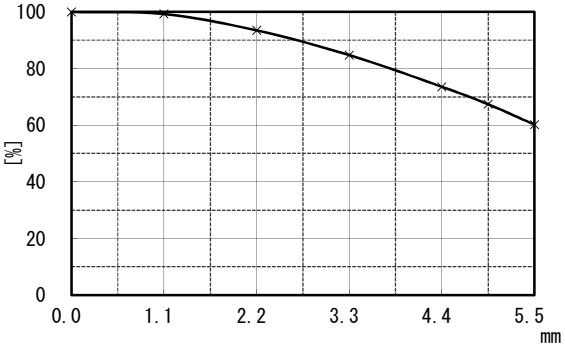


●Spectral Transmittance (分光透過率)

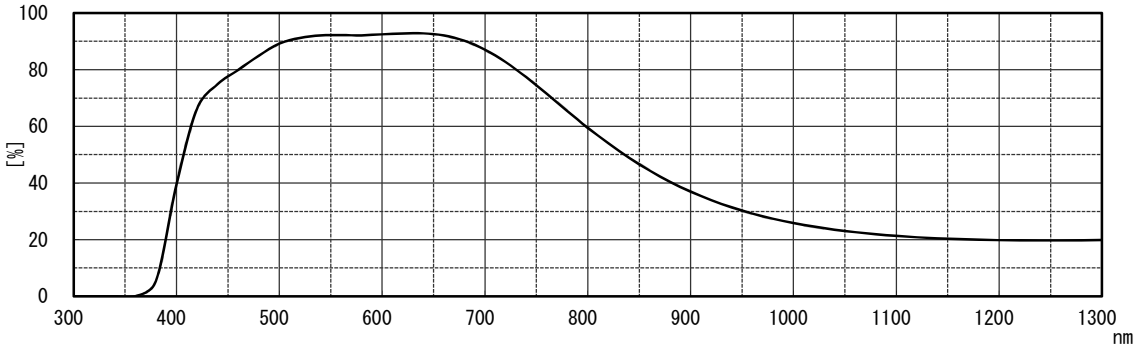


| | | |
|---|---|---|
| ●Entrance Pupil Position (入射瞳位置) | -44.64 | [mm]* |
| ●Exit Pupil Position (射出瞳位置) | -52.25 | [mm]* |
| ●1st Principal Point (第一主点) | -35.40 | [mm]* |
| ●2nd Principal Point (第二主点) | -11.99 | [mm]* |

( *:From Image Plane , W.D.=∞)

| RICOH Industrial Solutions Inc. | これらの値は設計データより算出された値です。<br>The above figures are calculated on design data. | Drawing Number<br>K664<br>1 / 1 |
|---|---|---|