


## TECHNICAL DATA

FL-BC2514D-VG


25mm 1:1.4

calculated


## ●Optical Transfer Function (OTF)

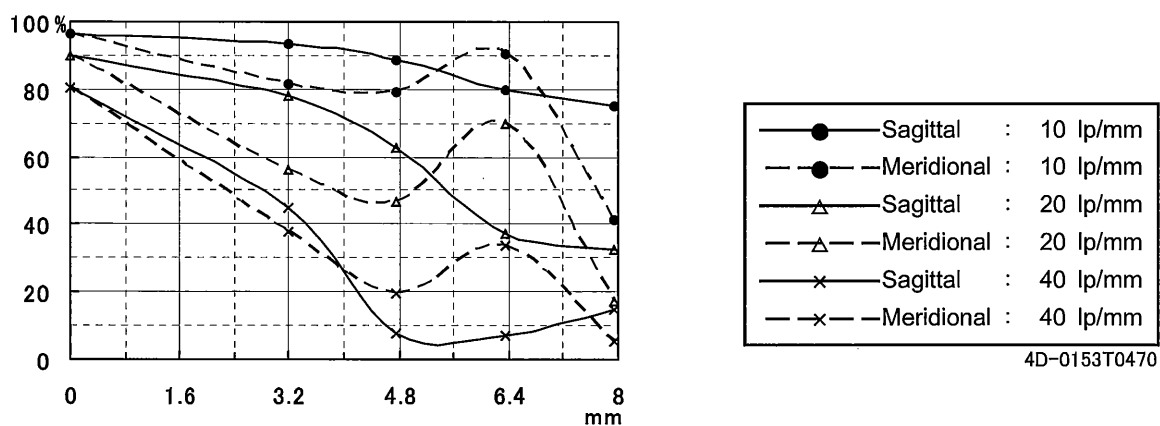


## ●Distortion (歪曲収差)

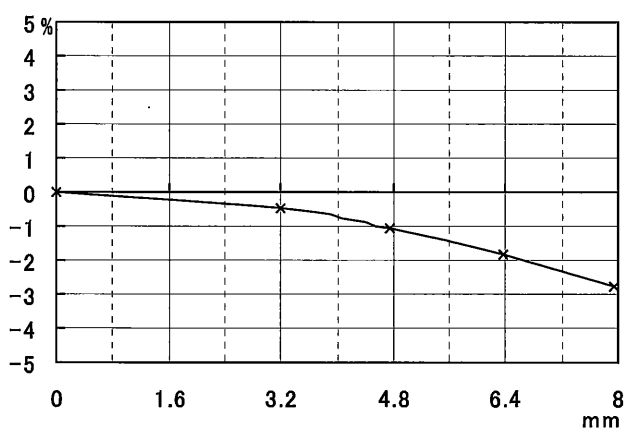

## ●Vignetting (周辺光量)

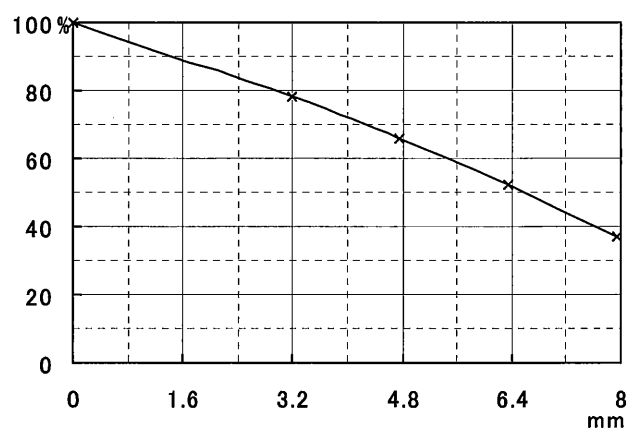

## ●Spectral Transmittance (分光透過率)

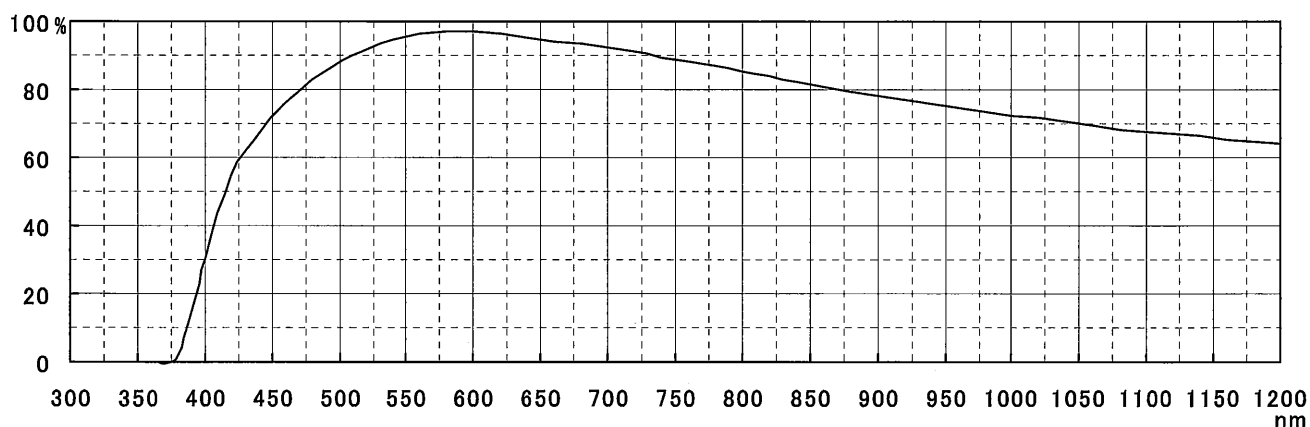

## ●Resolving Power (解像力)

y	0	4.76	6.35	7.94		
Rr(S)	200	25	20	20		
Rt(M)	200	25	40	10		

## ●Entrance Pupil Position (入射瞳位置)

-30.27 [mm] \*

## ●Exit Pupil Position (射出瞳位置)

-30.81 [mm] \*

## ●1st Principal Point (第一主点)

-25.59 [mm] \*

## ●2nd Principal Point (第二主点)

-25.06 [mm] \* (\* : From Image Plane)

RICOH Industrial Solutions Inc.

これらの値は設計データより算出された値です。 / 光学研究所

The above figures are calculated on design data. / Optical Technology Center

Drawing Number

22529

1/1